

CD50H SERIES



ALUMINUM ELECTROLYTIC CAPACITORS

- Load life of 1000 hours at 105°C
- 5mm height, Wide temperature




SPECIFICATIONS

Item	Characteristics							
Operating Temperature Range(°C)	-55~+105							
Rated Voltage Range (V)	6.3~50							
Nominal capacitance range (μF)	0.1~220							
Leakage Current (μA)	$I \leq 0.01CV$ or 3 whichever is greater (at 20°C, after 2 minutes) C: Nominal Capacitance (μ F), V: Rated Voltage (v)							
Capacitance Tolerance(20°C, 120Hz)	$\pm 20\%$							
Dissipation Factor(20°C, 120Hz)	Rated voltage (v)	6.3	10	16	25	35	50	
	$\tan\delta$	0.28	0.24	0.20	0.14	0.12	0.10	
Temperature Stability (120Hz)	Rated voltage (v)	6.3	10	16	25	35	50	
	Impedance ratio $z-25^{\circ}\text{C}/z+20^{\circ}\text{C}$	3			2			
Load Life(+105°C)	Time	1000hours						
	Leakage current	Not more than the specified value						
Shelf Life (+105°C)	Capacitance change	within $\pm 20\%$ of initial value						
	Dissipation factor	Not more than 200% of specified value						
		Time	500hours					
		Leakage current	Not more than the specified value					
		Capacitance change	within $\pm 20\%$ of initial value					
		Dissipation factor	Not more than 200% of specified value					
After test: Rated voltage to be applied for 60 minutes, 24 to 48 hours before measurement.								

DIMENSIONS

MM

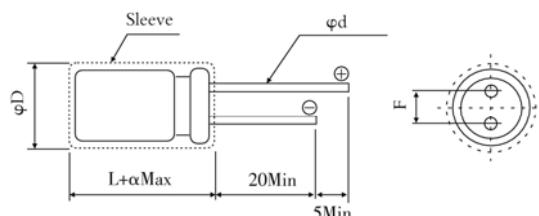

Lead spacing and diameter

$\phi D \pm 0.5$	4	5	6.3
$F \pm 0.5$	1.5	2.0	2.5
$\phi d \pm 0.1$	0.45		
a	0~+1.0		

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Freq (Hz)	50,60	120	1K	10K~100K
Rated voltage (v)				
6.3~16	0.64	0.80	0.92	1.0
25~35	0.57	0.71	0.89	1.0
50	0.53	0.67	0.90	1.0

Temperature coefficient

Temperature(°C)	+70	+85	+105
Coefficient	2.10	1.80	1

STANDARD RATINGS

Wv(v)	6.3	10	16	25	35	50
Cap(μ F)	Size(mm)	Ripple	Size(mm)	Ripple	Size(mm)	Ripple
	ϕDxL	(mA)	ϕDxL	(mA)	ϕDxL	(mA)
0.1	-	-	-	-	-	-
0.22	-	-	-	-	-	-
0.33	-	-	-	-	-	-
0.47	-	-	-	-	-	-
1	-	-	-	-	-	-
2.2	-	-	-	-	-	-
3.3	-	-	-	-	-	-
4.7	-	-	-	4x5	15	4x5
10	-	-	4x5	20	4x5	20
22	4x5	26	5x5	34	5x5	34
33	5x5	33	5x5	43	6.3x5	53
47	5x5	45	6.3x5	58	6.3x5	65
100	6.3x5	78	-	-	-	-
220	6.3x5	96	-	-	-	-

■ Ripple Current: 105°C, 100Hz or 120Hz.

The specific capacitance and case size are available on request.